


# MODEL SE5082

## 5GS/s Dual Channel Arbitrary Waveform Generators

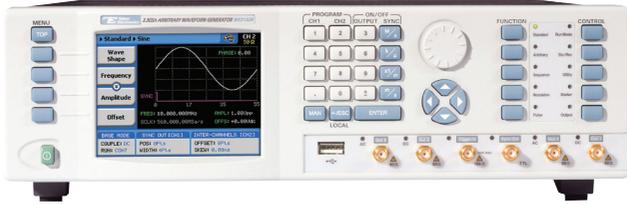

- Single, Dual or Four channel 5GS/s, 12 bit waveform generators
- Extra wide analog bandwidth of more than 7GHz
- Extremely fast rise and fall time of under 100ps
- Multi-Nyquist zone operation, up to the 4th Nyquist zone
- NRZ, NRTZ, RTZ and RF modes for optimized performance
- Inter-channel control from -3ns to +3ns with 10ps resolution
- Independent or synchronized channels configurations
- 16M waveform memory, 32M and 64M memory optional
- AM, FM, FSK, PSK, ASK, Amp. Hop, Freq. Hop, Sweep & Chirp
- Powerful pulse composer for analog, digital and mixed signals
- Various output amplifier modules utilized to solve numerous applications in different domains
- Smart trigger allows: trigger hold-off, detect  $\langle \Rightarrow \rangle$  pulse width, as well as wait-for-waveform-end or abort waveform and restart
- Advanced sequencer for step, loop, nest and jumps scenarios
- Built-in fast dynamic segments and sequences hop control
- Two differential markers per channel with programmable positions, width and levels
- User friendly GUI & Remote control through LAN, USB & GPIB
- Store/recall capability on disk-on-key or 4GB internal memory
- Multi instrument synchronization

The new Signal Expert Series sets new standards for high speed arbitrary waveform generators. With an analog bandwidth of more than 7 GHz, the new Signal Expert Series can reach frequencies much higher than its sampling rate. Combining this vast analog bandwidth with multi Nyquist zone operation the Signal Expert Series is capable of solving applications well beyond baseband and into the microwave frequencies. This new technology combined with advanced arbitrary and sequencing capabilities, excellent spectral purity, configurable output modules, and advanced triggering make the new Signal Expert Series the highest performing and most cost effective AWG of its class and even beyond.

### Multi-Nyquist Operation

Traditionally AWGs work only in the first Nyquist zone as signals in the higher Nyquist zones are suppressed, due to bandwidth and architecture limitations. But what if these signals were not suppressed? This would mean that with the proper filter it would be possible to generate signals well above

the sampling rate of the AWG. Utilizing new technology, the Signal Expert Series offers different sampling modes that optimize performance according to the Nyquist zone of interest. Coupled with the proper output module users can generate signals more than 7GHz and well into the microwave C-band area, all the while keeping excellent signal purity.

### Configurable Outputs Modules

Different applications require different output paths. This is why the Signal Expert Series offers a selection of various factory configured output modules. Each output module offers a different amplifier path, utilizing benefits which would match your specific application need. For example, the High Voltage module, which offers 3Vpp into 50Ω and up to 1GHz bandwidth, is utilized for various time domain applications, while for applications that require clean, direct IF/RF generation, one can order the DAC AC output module, which has a fixed 0dBm and 6GHz of bandwidth for exceptional spectral purity. Another example is the High

Bandwidth module, which offers 1Vpp with an unprecedented 9GHz of bandwidth utilizing the SE5082 full 7GHz bandwidth and offering a rise and fall time below 100ps. Other output modules will be made available soon, so feel free to share with us your requirements so that we can try and meet your application needs.

### Signal Integrity and Purity

One of the most important requirement in today's testing and measurement applications is high signal quality. With a typical SSB phase noise of  $\langle -115\text{dBc} \rangle$  at 100MHz, and  $\langle -95\text{dBc} \rangle$  at 1GHz, at 10 kHz carrier offset and with exceptionally good SFDR of  $\langle -70\text{dBc} \rangle$  at 1GHz carrier, Tabor's Signal Expert Series' unique platform delivers one of the best quality signals available on the market today, answering the ever-growing demand for clear and precise signals.

### IQ Generation

The ability to generate IQ signals is fundamental for any RF or communication

# MODEL SE5082

## 5GS/s Dual Channel Arbitrary Waveform Generators

engineer. With the advanced arbitrary capabilities and highly synchronized channels, the SE is ideal for generating digital modulations. The new Signal Expert Series offers excellent EVM performance even at 1.8GHz IQ bandwidth with less than 1% EVM for a 16QAM modulation, making it, by far, the best performance for price IQ source available in the market today.

### Common or Separate Clocks

Need a four, dual or a single channel unit... why choose? With the new Signal Expert Series you can have it all. The Signal Expert Series has up to four output channels, which can either operate independently, or synchronized to share the same sample clock source. As separate channels, one has the advantage of having up to four separate instruments in one box, with each having the ability to be programmed to output different function shapes, frequency, amplitude levels and/or to operate in different run modes. Alternatively, the advantage of having synchronized channels with less than 10ps skew and skew control is very significant in applications that require an accurate and controlled phase between the channels, which is ideal for many X-Y modes and I&Q output applications.

### Smart Trigger

Until now, you've been forced to trigger on a specific event. Tabor's all-new SmarTrigger feature was designed to enhance the trigger capability and facilitate wider flexibility of a specific pulse event. It allows triggering on either a pulse having a larger pulse width than a programmed time value (time), or even on a pulse having a pulse width between two limits (<>time). In addition, the SmarTrigger has a hold-off function, in which the output is held idle after the first trigger and starts a waveform cycle only with the first valid trigger after a hold-off interval has lapsed, allowing you to solve endless "negotiation" scenarios.

### Powerful Segmentation and Sequencing

Solving almost every complex application, powerful segmentation and sequencing produces a nearly endless variety of complex

waveforms. The waveform memory can be divided into multiple waveform segments and sequenced in user-selectable fashion to create complex waveforms that have repeatable segments, jump and nest, saving you precious memory space. The Signal Expert also allows you to generate up to 1000 sequence scenarios and sequence between them to generate an even higher level of flexibility in waveform creation.

### Programmable Differential Markers

The Signal Expert series is equipped with two programmable differential markers per channel. Differential simply means outstanding signal integrity for high frequencies, whereas the programmability allows you to set position, width, delay and amplitude for any required peripheral triggering need. While bench usage enables setting only one marker position, you can set multiple markers and program different marker properties for each transition instance remotely, allowing various triggering profiles.

### Pulse / Pattern Creation

Generating complex pulse trains has never been easier. The Pulse Composer is a powerful built-in tool that converts the Signal Expert Series to a very sophisticated Pulse/Pattern Generator, allowing to create literally any complex pulse train / pattern, whether it's a single pulse, multi-level, linear-points, initialization or preamble pattern definition, user-defined or even standard random patterns with programmable resolution, so it doesn't matter if your application is radar communications, nanotechnology or serial bus testing, the pulse/pattern composer is the right tool for your application. Moreover, all the Signal Expert Series advanced trigger modes are applicable, hence one can choose to use the "step" mode to advance every bit independently or the "once" mode to advance a complete data block in one trigger event, enabling even more applications, such as trigger, clock and data protocols.

### Dynamic Segment / Sequence Control

Working in the real-time world and need fast waveform switching? The Signal Expert series has a rear panel control designed specifically

for that. Having the dynamic control feature, in effect, can serve as replacement of the sequence table where the real-time application can decide when and for how long a waveform will be generated. For much more complex applications, this same input may serve as a dynamic switch for complete sequences, creating real-life scenarios for real-time applications.

### Multiple Environments to Write Your Code

The Signal Expert Series comes with a complete set of drivers, allowing you to write your application in various environments including Labview, CVI, C++, VB and MATLAB. You may also link the supplied dll to other Windows-based API's or use low-level SCPI commands to program the instrument, regardless of whether your application is written for Windows, Linux or Macintosh operating systems.

### Easy to Use

Large and user-friendly 4" backlit color LCD display facilitates browsing through menus, updating parameters and displaying detailed and critical information for your waveform output. Combined with numeric keypad, ten quick-link function & run mode buttons, cursor position control and a dial, the front panel controls simplify the often complex operation of an arbitrary waveform generator.

### ArbConnection

ArbConnection is a powerful software package that allows you to easily design any type of waveform and control the instrument functions, modes and features via a graphical user interface (GUI). Whether you need to generate output using a built-in waveform, a hand sketched or played back waveform, a pulse pattern, a serial data string, a modulated carrier or even an equation, ArbConnection provides you the editing tool which makes virtually any application possible.

# MODEL SE5082

## 5GS/s Dual Channel Arbitrary Waveform Generators

### CONFIGURATION

Output Channels 1/2, Synchronized/fully separated

### STANDARD WAVEFORMS

Type: Sine, triangle, square, ramp, pulse, sin(x)/x, exponential rise, exponential decay, gaussian, noise and DC.

### Frequency Range:

Sine 1μHz to 1GHz  
 Square, Pulse 1μHz to 500MHz  
 All others 1μHz to 250MHz

### SINE

Start Phase: 0 to 360°

Phase Resolution: 0.01°

Harmonics Distortion (typ.):

	DC	HV	AC
	1Vpp	3Vpp	0dBm
5MHz to 200MHz	<-44dBc	<-40dBc <sup>(1)</sup>	<-40dBc
200MHz to 375MHz	<-40dBc <sup>(1)</sup>	<-40dBc <sup>(1)</sup>	<-40dBc
375MHz to 500MHz	<-35dBc <sup>(1)</sup>	<-35dBc <sup>(1)</sup>	<-50dBc
500MHz to 700MHz	<-32dBc <sup>(1)</sup>	<-32dBc <sup>(1)</sup>	<-55dBc
700MHz to 1GHz	<-70dBc <sup>(1)</sup>	<-70dBc <sup>(1)</sup>	<-70dBc

<sup>(1)</sup> Measured with 1GHz lowpass filter

### Non-Harmonics Distortion (typ.):

1MHz to 100MHz <-80dBc  
 100MHz to 250MHz <-75dBc  
 250MHz to 500MHz <-70dBc  
 500MHz to 1GHz <-65dBc

### SSB Phase Noise (10kHz offset):

1MHz Carrier <-120dBc/Hz  
 10MHz Carrier <-118dBc/Hz  
 100MHz Carrier <-115dBc/Hz  
 250MHz Carrier <-108dBc/Hz  
 500MHz Carrier <-100dBc/Hz  
 1GHz Carrier <-95dBc/Hz

### Flatness (AC Path):

Cross Range ±0.5dB

### PULSE

Pulse Mode: Single or double, programmable

Polarity: Normal, inverted or complement

Period: 2ns to 1.6s

Resolution: 500ps

Pulse Width: 1ns to 1.6s

### Rise/Fall Time:

Fast  
 DC Path 600ps (typical < 500ps)  
 HV Path 1ns (typical < 900ps)  
 Linear 1ns to 1.6s

Delay: 1ns to 1.6s

Double Pulse Delay: 1ns to 1.6s

### Amplitude:

Range  
 DC Path 50mVp-p to 2Vp-p into 50Ω  
 HV Path 100mVp-p to 4Vp-p into 50Ω

### Levels

Low Level -2V to +1.95V  
 High Level -1.95V to +2V

### NOTES:

- All pulse parameters, except rise and fall times, may be freely programmed within the selected pulse period provided that the ratio between the period and the smallest incremental unit does not exceed the ratio of 16,000,000 to 1.
- Rise and fall times, may be freely programmed provided that the ratio between the rise/fall time and the smallest incremental unit does not exceed the ratio of 1,000,000 to 1.
- The sum of all pulse parameters must not exceed the pulse period setting.

### PULSE / PATTERN COMPOSER

#### MULTI-LEVEL / LINEAR-POINTS

Number of Levels: 1 to 1000  
 Dwell Time: 500ps to 1s  
 Transition type: Fast or Linear  
 Memory: 100k  
 Amp. Resolution: 4 digits  
 Time Resolution: 500ps to 100ns (auto or user)

#### PATTERN

Pattern Source: PRBS or user-defined  
 PRBS Type: PRBS7, PRBS9, PRBS11, PRBS15, PRBS23, PRBS31, USER

Data Rate: 1Bit/s to 500MBit/s

Number of Levels: 2, 3, 4, 5

High/Low Levels: ±2V

Resolution: 4 digits

Loops: 1 to 1e6

Preamble: 1 to 16e6

Length: 2 to 16e6

#### ARBITRARY WAVEFORMS

Sample Rate: 10MS/s to 2.3GS/s

Vertical Resolution: 14 bits

Waveform Memory: 16M points standard, 32M points optional

Min. Segment Size: 192 points

Resolution: 16 points

No. of Segments: 1 to 32k

Waveform Granularity: 1 point

Dynamic control: Software command or rear panel segment control port

Jump Timing: Coherent or asynchronous

#### SEQUENCED WAVEFORMS

Multi Sequence: 1 to 1,000 unique scenarios

Sequencer Steps: 1 to 48k steps.

Segment Loops: 1 to 16M cycles, each segment

Sequence Loops: 1 to 1M ("Once" mode only)

Step Advance Modes: Continuous, once (x "N") and stepped

### SEQUENCED SEQUENCES

Sequence Scenarios: 1 Scenario  
 Dynamic Control: Software command or rear panel sequence control port  
 Table Length: 1 to 1k steps  
 Advance Control: Continuous, once and stepped  
 Sequence Loops: 1 to 1,000,000 cycles

### MODULATION

#### COMMON CHARACTERISTICS

Carrier Waveform: Sine, square, triangle

Carrier Frequency: 10kHz to 1GHz

Modulation Source: Internal

#### FM

Modulation Shape: Sine, square, triangle, ramp

Modulation Freq.: 100Hz to 100MHz

Deviation Range: 10mHz to 500MHz

#### FSK / FREQUENCY HOPPING

FSK Baud Rate: 10mbps to 500Mbps

Hop Table Size: 2 to 256

Hop Type: Fast or Linear

Dwell Time Mode: Fixed or programmable per step

Dwell Time: 2ns to 10s

Dwell Time Res.: 2ns

#### SWEEP / CHIRP

Sweep Type: Linear or log

Sweep Direction: Up or down

Sweep Time: 1.4 μs to 10ms

Modulation Shape: Pulse

Pulse Repetition: Range 200ns to 20s

Resolution 3 digits

Accuracy 100ppm

#### AM

Modulation Shape: Sine, square, triangle, ramp

Modulation Freq.: 100Hz to 1MHz

Modulation Depth: 0.1 to 200%

#### ASK / AMPLITUDE HOPPING

ASK Baud Rate: 10mbps to 500Mbps

Hop Table Size: 2 to 256

Hop Type: Fast or Linear

Dwell Time Mode: Fixed or programmable per step

Dwell Time: 2ns to 10s

Resolution 2ns

# MODEL SE5082

## 5GS/s Dual Channel Arbitrary Waveform Generators

### (n)PSK and (n)QAM

Modulation Type:	PSK, BPSK, QPSK, OQPSK, PI/4 DQPSK, 8PSK, 16PSK, 16QAM, 64QAM, 256QAM and User Defined
Symbol Rate Range:	10Mbps to 500Mbps
Symbol Accuracy:	1ppm
Table Size:	2 to 256

### COMMON CHARACTERISTICS

#### FREQUENCY

Resolution:	12 digits
Accuracy/Stability:	Same as reference

#### ACCURACY REFERENCE CLOCK

Internal	1 ppm from 19°C to 29°C; 1ppm/°C below 19°C or above 29°C; 1 ppm/year aging rate
External	Same as accuracy and stability of the external ref.

### OUTPUTS

#### MAIN OUTPUTS

Coupling:	DC-coupled, or AC-coupled
Connectors:	Front panel SMAs
Impedance:	50Ω nominal, each output
Protection:	Protected against temporary short to case ground

#### DC-COUPLED

Type:	Single-ended or differential
Resolution:	4 digits
Accuracy:	±(2% +2 mV), offset = 0V
Overshoot:	5%, typical

#### DC PATH

Rise/Fall Time:	< 600ps (typical < 500ps)
Amplitude Range:	
Single-ended	50mVp-p to 2Vp-p*
Differential	100mVp-p to 4Vp-p*

#### HV PATH

Rise/Fall Time:	1ns (typical < 900ps)
Amplitude Range:	
Single-ended	50mVp-p to 4Vp-p*
Differential	100mVp-p to 8Vp-p*

\* Double into high impedance

#### OFFSET

Offset Range:	-1.5V to + 1.5V into 50Ω
Offset Resolution:	4 digits
Offset Accuracy:	±2% + 15mV

### RF, AC-COUPLED

Type:	Single-ended
Amplitude Range:	-20dBm to +10dBm into 50Ω,
Resolution:	4 digits
Accuracy:	±(3% +0.5dBm)
Bandwidth:	1GHz

### MARKER OUTPUTS

Number of Markers:	Two markers per channel
Type:	Differential (+) and (-) outputs
Connectors:	SMB
Skew Between Markers:	100ps, typical
Impedance:	50Ω
Amplitude Voltage:	
Window	0V to 1.25V, single-ended; 0V to 2.5V, differential
Low level	0V to 0.8V, single-ended; 0V to 1.6V, differential
High level	0.5V to 1.25V, single-ended; 0V to 2.5V, differential

Resolution:	10mV
Accuracy:	10% of setting
Width control:	2 SCLK to segment length;

Position control:	
Range	0 to segment length
Resolution	2 points
Initial delay:	4ns±½ clock (Output to marker)
Variable delay:	
Control	Separate for each channel
Range	0 to 3ns
Resolution	10ps
Accuracy	±(10% of setting +20ps)
Rise/Fall Time:	<1ns, typical

### DIGITAL OUTPUTS (OPTION D)

Number of Bits:	32 output channels
Type:	Differential (+) and (-) outputs
Connectors:	High speed I/O receptacle, 68-pin VRDPC
Skew Between Bits:	100ps, typical
Level:	LVDS
Impedance:	100Ω
Max. Data Rate:	1.15Gb/s
Pattern Memory:	Up to 16MWord
Source	Dedicated or parallel

### SYNC OUTPUT

Connector:	Front panel SMA
Source:	Channel 1 or channel 2
Type:	Single ended
Waveform Type:	
Pulse	16 points width
WCOM	Waveform complete
Impedance:	50Ω

Amplitude:	1V; doubles into high impedance
Variable Position Control:	
Range	0 to segment length
Resolution	16 points
Rise/Fall Time	2ns, typical
Variable Width control:	
Range	16 points to segment length
Resolution	16 points

### INPUTS

#### TRIGGER INPUT

Connector:	Front panel SMA
Input Impedance:	1kΩ or 50Ω, selectable
Polarity:	Positive, negative, or both
Damage Level:	±20Vdc
Frequency Range:	0 to 15MHz
Trigger Level Control:	
Range	-5V to 5V into 50Ω; -10V to 10V into 1kΩ
Resolution	12 bit (2.5mV)
Accuracy	±(5% of setting + 2.5mV)
Sensitivity	0.2Vp-p
Min. Pulse Width:	10 ns

#### EVENT INPUT

Connector:	Rear panel BNC
Input Impedance:	10kΩ or 2.2kΩ pull up to +5V
Polarity:	Positive, negative or either
Damage Level:	±20Vdc
Frequency Range:	0 to 15MHz
Trigger Level Control:	
Range	-5V to 5V
Resolution	12 bit (2.5mV)
Accuracy	±(5% of setting + 2.5mV)
Sensitivity	0.2 Vp-p minimum
Min. Pulse Width:	10 ns

#### SEQUENCE/SEGMENT CONTROL INPUT

Connectors:	Rear panel D-sub, 8 bit lines
Input Impedance:	10kΩ
Input Level:	TTL

#### EXTERNAL REFERENCE INPUT

Connector:	Rear panel BNC
Input Frequency:	10 MHz to 100 MHz, programmable
Input Impedance:	50Ω
Voltage Swing:	-5dBm to 5dBm
Damage Level:	10dBm

# MODELS SE5082

## 5GS/s Dual Channel Arbitrary Waveform Generators

### EXTERNAL SAMPLE CLOCK INPUT

Connector:	Rear panel SMA
Input Impedance:	50Ω
Voltage Swing:	0dBm to 10dBm
Input Frequency:	10MHz to 2.3GHz
Clock Divider:	1/1, 1/2, 1/4, 1/256, separate for each channel
Damage Level:	15dBm
Input Voltage Range:	
AC	0.25Vp-p to 1Vp-p
DC	±10V max.

### RUN MODES

<b>Continuous:</b>	A selected output function shape is output continuously.
<b>Self Armed:</b>	No start commands are required to generate waveforms.
<b>Armed:</b>	The output dwells on a DC level and waits for an enable command and then the output waveform is output continuously; An abort command turns off the waveform.
<b>Triggered:</b>	A trigger signal activates a single-shot or counted burst of output waveforms and then the instrument waits for the next trigger signal.
<b>Normal Mode</b>	The first trigger signal activates the output; consecutive triggers are ignored for the duration of the output waveform.
<b>Override Mode:</b>	The first trigger signal activates the output; consecutive triggers restart the output waveform regardless if the current waveform has been completed or not.
<b>Gated:</b>	A waveform is output when a gate signal is asserted. The waveform is repeated until the gate signal is de-asserted. Last period is always completed.
<b>Burst:</b>	Upon trigger, outputs a Dual or multiple pre-programmed number of waveform cycles from 1 through 1M.

### TRIGGER CHARACTERISTICS

#### EXTERNAL

Source:	Channel 1, channel 2, or both
Connector:	SMA
Input Impedance:	1kΩ or 50Ω, selectable
Polarity:	Positive, negative, or both
Damage Level:	±20Vdc
Frequency Range:	0 to 15MHz

#### Trigger Level Control:

Range	-5V to 5V into 50Ω; -10V to 10V into 1kΩ
Resolution	12 bit (2.5mV)
Accuracy	±(5% of setting + 2.5mV)
Sensitivity	0.2Vp-p
<b>Pulse Width:</b>	10 ns, minimum
<b>System Delay:</b>	200 SCLK periods + 50ns
<b>Trigger Delay:</b>	Separate for each channel
Range	0 to 8,000,000 SCLK periods
Resolution	4 points
Accuracy	Same as SCLK accuracy
<b>Smart Trigger:</b>	Detects a unique pulse width
<b>Conditioned Trigger:</b>	< pulse width, > pulse width or <> pulse width
Pulse Width Range	50ns to 2s
Resolution	2ns
Accuracy	±(5% of setting +20ns)
<b>Trigger Hold-off:</b>	Ignores triggers for a hold-off
Hold-off range	100ns to 2s
Resolution	2ns
Accuracy	±(5% of setting +20ns)
<b>Trigger jitter:</b>	4 SCLK periods

#### INTERNAL

<b>Source:</b>	Common or separate
<b>Modes:</b>	
Timer	Waveform start to waveform start
Delayed	Waveform stop to waveform start
<b>Timer:</b>	
Range	200ns to 10s
Resolution	3 digits
Accuracy	100ppm
<b>Delay</b>	
Range	152 to 8,000,000 SCLK periods
Resolution	Even numbers, divisible by 4

#### MANUAL

<b>Source:</b>	Soft trigger command from the front panel or remote
----------------	---

#### INTER-CHANNEL SKEW CONTROL

##### COURSE TUNING

<b>Initial skew:</b>	200ps
<b>Control:</b>	
Range	0 to waveform-length points
Resolution	4 points
<b>Accuracy:</b>	Same as SCLK accuracy

##### FINE TUNING

<b>Initial skew:</b>	200ps
<b>Control:</b>	
Range	-3ns to +3ns
Resolution	10ps
<b>Accuracy:</b>	(10% of setting + 20ps)

#### TWO INSTRUMENTS SYNCHRONIZATION

<b>Initial Skew:</b>	20ns + 0 to 8 SCLK
<b>Offset Control:</b>	0 to Waveform length
<b>Offset Resolution:</b>	4 SCLK increments
<b>Skew Control:</b>	-5ns to 5ns
<b>Skew Resolution:</b>	10ps

#### GENERAL

<b>Voltage Range:</b>	100VAC to 240VAC
<b>Frequency Range:</b>	50Hz to 60Hz
<b>Power Consumption:</b>	150VA
<b>Display Type:</b>	TFT LCD, 4", 320 x 240 pixels
<b>Interfaces:</b>	
USB	1 x front, USB host, (A type); 1 x rear, USB device, (B type)
LAN	1000/100/10 BASE-T
GPIB	IEEE 488.2 standard interface
Segment control	2 x D-sub, 9 pin
<b>Dimensions:</b>	
With Feet	315 x 102 x 395 mm (WxHxD)
Without Feet	315 x 88 x 395 mm (WxHxD)
<b>Weight:</b>	
Without Package	4.5kg
Shipping Weight	6kg
<b>Temperature:</b>	
Operating	0°C to 40°C
Storage	-40°C to 70°C
<b>Humidity:</b>	85% RH, non condensing
<b>Safety:</b>	CE Marked, IEC61010-1
<b>EMC:</b>	IEC 61326-1:2006
<b>Calibration:</b>	2 years
<b>Warranty (1):</b>	5 years standard

#### ORDERING INFORMATION

MODEL	DESCRIPTION
WX2181C	2.3GS/s Single Channel Arbitrary Waveform Generator
WX2182C	2.3GS/s Dual Channel Arbitrary Waveform Generator

#### OPTIONS

<b>Option 1:</b>	32M Memory (per channel)
<b>Option D:</b>	32 Bits / Digital Outputs
<b>Option 520D:</b>	Tek AWG520 Hardware and Firmware Emulator

#### ACCESSORIES

<b>Sync Cable:</b>	Multi-instrument synchronization
<b>S-Rack Mount:</b>	19" Single Rack Mounting Kit
<b>Case Kit:</b>	Professional Carrying Bag

**Note:** Options and Accessories must be specified at the time of your purchase.

<sup>(1)</sup> Standard warranty in India is 1 year.